CANTER

4 Wheeler

BOLD NEW FACE. BETTER DRIVING EXPERIENCE.

CANTER



MA

FUSC

FE71PB




CANTER

FETIPB

3.9L 4D34 ENGINE

Built for the long run. Reliable performance comes hand in hand with power and fuel efficiency.

ANTI-LOCK BRAKING SYSTEM (ABS) and Automatic Brake Adjustor

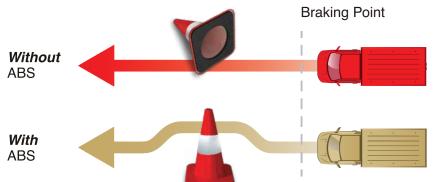

ABS help to maintain control of the vehicle during emergency braking situations, and enable proper steering around obstacles.

IN DASH GEARSHIFT



Easier operation and comfortable driving position. Provides ample leg room for easy shift from driver-seat to assistant-seat.

01 Simple, compact & functional dashboard. Ergonomic arrangement of switchers, levers and open space.

EXTERIOR



06 Headlamp levelling provide optimum headlamp and light projection distance. Comes with day time running lamp.



07 1400mm wide rear tread allows installation of higher and wider cargo bodies.



08 Reverse sensor for easy reverse operation.







- 02 New stylish and easy-toread instrument cluster.
- 03 New seat design with wide seat adjustment to provide comfortable driving position.




04 Impact absorption steering column.




05 Central locking and power window.



09 Tubeless tyre providing longer tread life and gentle deflation in case of puncture.



10 Fuso RISE Body with door impact beam, front box structure and reinforced cab floor main sill.



11 Maximum Gradeability $(tan\theta) : 56\%$

TECHNICAL SPECIFICATION

	LUIMUAL SPLU		
	MODEL R.H.D		FE71PB8SRDG3
WEIGHT	Max G.V.W.	kg	4,500
	Front axle	kg	1,380
	Rear axle	kg	495
	Kerb weight approx.	kg	1,875
DIMENSIONS	Wheelbase (W.B.)	mm	2,500
	Overall length (O.A.L.)	mm	4,580
	Overall width (O.A.W.)	mm	1,705
U U U	Overall height (O.A.H.)	mm	2,005
ENGINE	Tread Front (T.F.)	mm	1,390
	Rear (T.R.)	mm	1,400
	Ground clearance approx. (G.C.)	mm	187
	Cab to rear axle (C.A.)	mm	2,030
	Cab to end frame (C.E.)	mm	3,095
	Frame width (F.W.)	mm	700
	Front overhang (F.O.H.)	mm	1,015
	Rear overhang (R.O.H.)	mm	1,065
	Model	-	Mitsubishi 4D34-2AT5 turbocharge with intercooler
	Туре	-	4-stroke, water-cooled, direct injection diesel engine
	No. of cylinders	-	4 in line
	Piston displacement	сс	3,908
	Max. output	kW(PS)@rpm	81(110)@2,900
	Max. torque	Nm@rpm	275@1.600
	Air cleaner	-	Dry paper element type
	Alternator	Volt	24V - 50Amps
DRIVELINE	Clutch	Туре	Hydraulic control, single dry plate
		mm	275
	Transmission		M025S5
			5 forward and 1 reverse speed, manual, overdrive
Δ		-	1 st to 5 th range; Synchromesh gears
			Reverse; Constantmesh gears
	Gear ratios	-	5.181-2.865-1.593-1.00-0.739-Reverse 5.181
	Final reduction gear	-	Single reduction, hypoid gear
	Ratio	-	6.166
z	Seating capacity	-	3
ABIN	Cabin tilt	-	Mechanical
CHASSIS C/	Power windows	-	Equipped
	Central lock & alarm system	-	Equipped
	Reverse sensors & buzzer	-	Equipped
	Kangaroo bar	-	Equipped
	Axle type/Rating	Front	Reverse elliot, "I" beam type
		Rear	Full floating type
	Tyres	Studs	5
		Tyre Size	205/85R16
	Steering	<u> </u>	Right hand steering. Ball nut type with integral type hydraulic power booster.
			Telescopic and tilt steering column with steering lock
	Suspension	Front	Laminated leaf springs with shock absorbers and stabilizer
		Rear	Laminated leaf springs with shock absorbers
	Brake	Service	Hydraulic with vacuum servo assistance, dual circuit with antilock brake system (ABS)
			and auto brake shoes adjuster
		Parking	Internal expanding type on propeller shaft
		Auxiliary	Exhaust brake
	Fuel tank	-	70 liters
	Electrical system	-	12 Volt x 2, 65Ah at 20 hr. rate
		M	ITSUBISHI FUSO authorised dealer: 100 000km

FUSO Financial

FUSO Financial – A Daimler Financial Services Brand. The financial services provided by Mercedes-Benz Services Malaysia Sdn Bhd are regulated by the provisions of the Financial Services Act 2013. Mercedes-Benz Services Malaysia's operations are not within the regulatory purview of . Bank Negara Malaysia.

MITSUBISHI FUSO authorised dealer:





MITSUBISHI FUSO authorised distributor: Mercedes-Benz Malaysia Sdn Bhd (596096-H) Wisma Mercedes-Benz, 16A Jalan BK 1/13, Taman Perindustrian Bandar Kinrara, 47180 Puchong, Selangor Darul Ehsan. Tel : +603-8074 1188 | Fax : +603-8074 1199 www.fuso.my

Note: The information in this catalogue is to be regarded as approximate. The illustration may contain non-standard accessories and extras. Actual specifications may differ from the catalogue. We reserve the right to change the design, technical features and scope of delivery.